



Parts Identification

Floor Drain

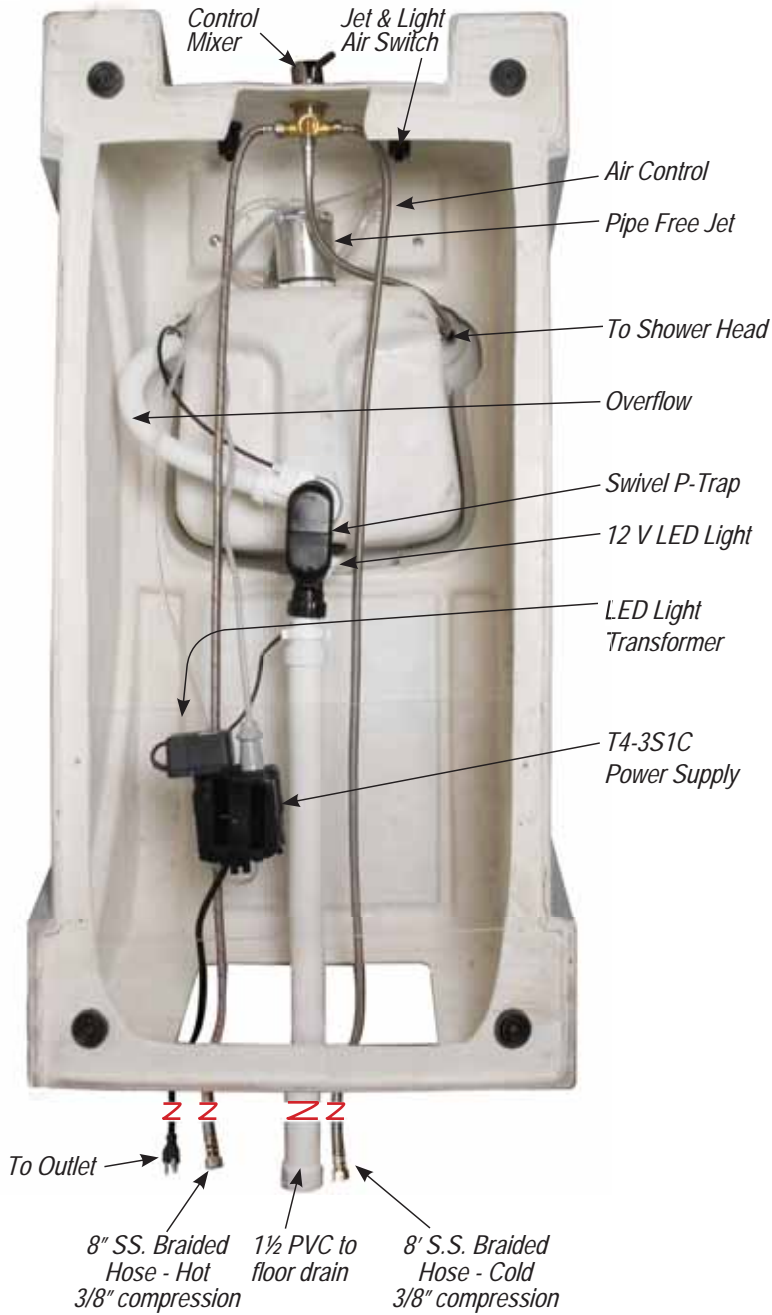

Wall Drain

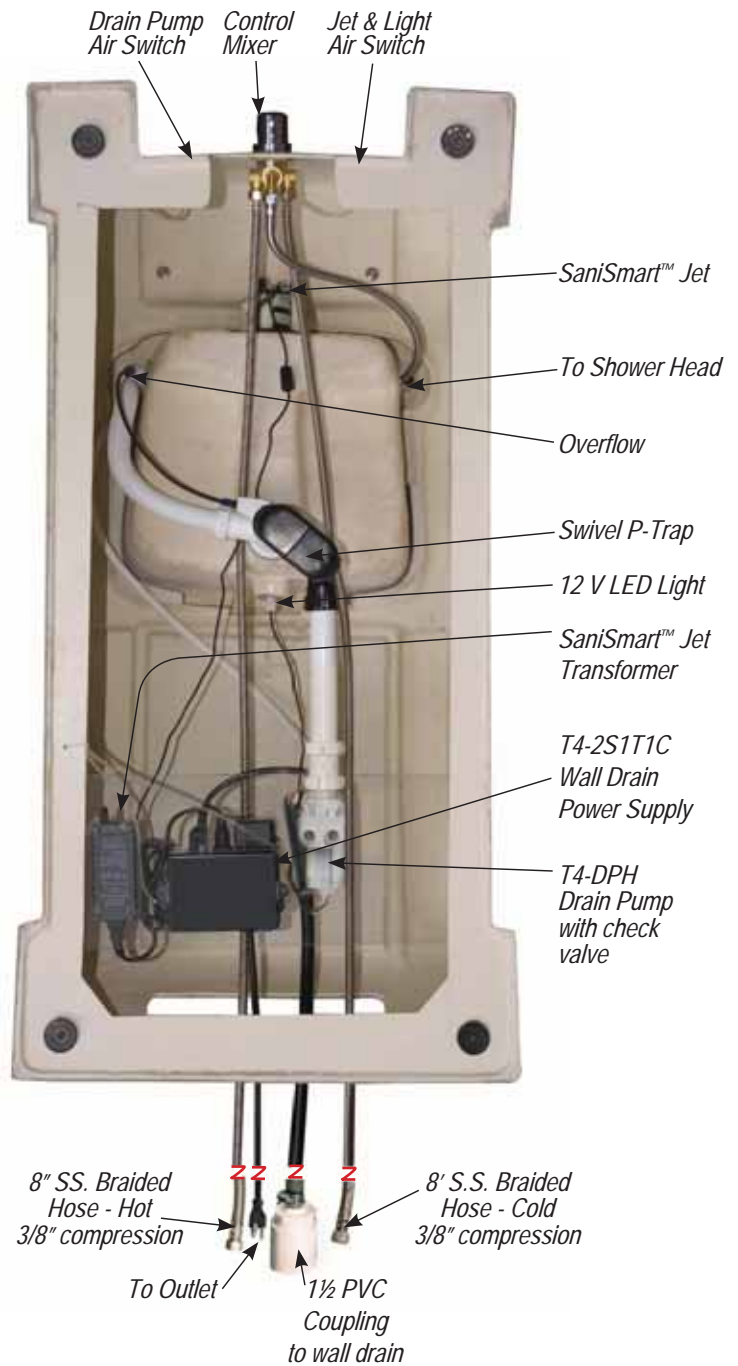

Parts

Spa Jets

Geni Jet 120 V
T4-GJ



Powerful pipe free motor pulse jet.
Air venturi. Easy to clean.

SaniSmart™ 2.0 Jet 24W
T4-SS



Dry End
(includes motor and board)
T4-SSD



Wet End
T4-SSW



Transformer 24W DC
T4-SST

New Technology. Works with spa liners.
No drilling necessary.

D29 Jet 120V/85W
T4-D29



Jets are angled to 29° for precise
whirlpool action.

Drain Pump Assemblies

Little Giant Drain Pump Assembly
T4-DP



Includes check valve & P-Trap 110V 2.5A

T 4 Drain Pump Assembly
T4-DPH



Includes check valve & P-Trap 110V 1A

Check Valves

Dual Check Valve
T4-DCV



1/2" compression

3/8" compression

Some cities require a backflow preventer to be installed
on hot/cold water line.

CSA approved.

1/2" Check Valve
T4-1/2 CV



Use with drain pump.

Hardware

1/2" Diverter Tee
T4-DT



1/2" NPSM

1/2" NPSM

1/2" NPSM

Allows 1 direction flow to spray nozzle
or filler spout. (for older spa designs)

Power Supply

Floor Drain Power Supply

T4-3S1C



3 on/off, 1 continuous
Activate by air switch.

Wall Drain Power Supply

T4-2S1T1C



2 on/off, 1 timer (2 minutes), 1 continuous
Activate by air switch.

LED Lights

LED Light set

T4-L18



Set includes:
18 LED bulbs, AC 12V transformer, reflector housing, nut & gasket, light holder.
Bulb (T4-L18B) and transformer (T4-L18T) also available separately.

LED Light Set PRC

T4-L18C



Set includes:
18 LED bulbs, AC 12V transformer, reflector housing, nut & gasket, light holder.
Bulb (T4-L18BC) and transformer (T4-L18TC) also available separately.

Air Control

Silent Air Control

T4-AC



For use with Geni Jet.
Controls air mixed with water jet.

Air Control Tube

T4-ACT



3/8" 100' roll

Air Control Barbs

a.



a. 3/8 barb x 1/2 spg
T4-ACB½

b.



b. 3/8 barb tee
T4-ACBT

Parts

Plumbing Accessories

Level Controller with Solenoid Valve

T4-LCSV



1 1/2" Swivel P-Trap

T4-SPT



Eliminates odors from drain.

Overflow Assembly

T4-OFC



8' Stainless Steel Braided Hoses

T4-BHH - Hot T4-BHC - Cold



1/2 NPSF x 3/8 compression Flexible Tube. UPC Approved.

Shower Head and Hose

Shower Head Complete

T4-SH2



Includes shower head, angle holder & stainless steel hose.

Shower Head Only

T4-SH2HH



Stainless Steel Hose Only

T4-SH2H



Push Button

Engraved Metal Push Button

T4-PBM



Push Button Tube

T4-PBT



1/8" Clear tubing. 500' Roll

Control Mixer

Control Mixer Single lever

T4-LCM



1/2" NPSM Connections

Control Mixer Clockwise

T4-CCM



1/2" NPSM Connections

Econo Control Mixer

T4-ECM



1/2" NPSM Connections

Single Lever Replacement Cartridge

T4-LCMC



Clockwise Replacement Cartridge

T4-CCMC



Econo Replacement Cartridge

T4-ECMC



Specifications

HT-135-PS1 Chair Specifications

Massage Robot: 3 Motor/ 4 Roller
Operating Voltage: 110 -120 V / 50 Hz
Power Consumption: 70 Watts
Size: Chair (reclined) 61"L x 28"W x 34"H
Recline Angle: 165 Degrees
Forward/Backward: 5" distance

Number of Massage Functions: Four (4)
Programmed Function: 4 Steps (Repeating)
Massage Head Storage: Auto at Top
Automatic Timer Shut-Off: 15 minutes
Total Massage Stroke Length: 18.0 Inches
Full Length Travel: 43 seconds (25 - 35 - 45 In/Min)
Rolling: 25 - 35 In/Minute
Kneading: 50 - 35 - 20 Cycles/Minute
Compression: 70 - 50 Cycles/Minute
Percussion: 135 -110 Cycles/Minute
Up/Down: 25 - 35 - 45 In/Minute
Cover Fabric Material: Polyurethane
Accessories: Massage Softening Pads
Hand-held low voltage remote control for massage chair.

*Specifications are subject to change without prior notice.

HT-115-PS Chair Specifications

Massage Robot: 2 Motor/ 4 Roller
Operating Voltage: AC110 -120 V 60 Hz
Power Consumption:50 Watts
Size: Chair (reclined) 45" L x 28" W x 32" H
Recline Angle: 165 Degrees
Forward/Backward: 5" distance

Chair Weight - 80 lbs
Maximum load weight - 285 lbs

Number of Massage Functions: Three (3)
(Rolling, Kneading, Compression)
Automatic Massage Mode - (1)
Massage Head Storage: Auto at Top
Automatic Timer Shut-Off: 15 minutes
Cover Fabric Material: Polyurethane
Hand-held low voltage remote control for massage chair.

*Specifications are subject to change without prior notice.

Basin Specifications

Hot and cold water supply lines required (hot and cold shut offs may be installed under or behind pedicure spa basin) see pg 6

Drain installation: Reference note on page 8; can be installed with optional drain pump for wall drain or a gravity drain.

Capacity of basin: 4.5 U.S. Gallons (17.03L) = Traditional Whirlpool (with Jets)*

Power source: 110V AC / 15 Amp, 60 Hz (GFCI Protected)

Caution: Pedicure spa must be installed by a licensed electrician and a licensed plumber, conforming to all local and national electrical codes.

Jet System: Pipe free whirlpool pedicure spas: 1 jet, LED lights, optional drain pump.

Jets: (may contain either)

Geni Jet Motor: 120V AC, 60Hz, 1.2A

D-29 Jet: 120V, 85W, 60Hz, 1A

Sanismart Jet: 110V AC, 60 Hz

Drain Pump Motors: (may contain either)

Little Giant - Model # 3E-34N, 115V, 60 Hz, 2.5A,

T4-DPH: 120 V AC, 85W, 60Hz, 1 A

LED Lights: (may contain either)

T4-L18: input: 120V AC, 60Hz, 28VA Output: 12V, 60 Hz, 1.67A

T4-L18C: input: 120V AC, 60Hz, 28 VA, Output: 12V Ac 1.67A, 20VA, Class 2

Electrical switches: On/Off air switch for Geni Jet & Led Light. On/Off air switch for drain pump.

Limited warranty: One (1) year from date of purchase.

Due to our policy of continuous improvements, all specifications are subject to change without notice.

*Note: All dimensions and weights are approximate

Shipping Weights: (Total)

Avanti - 323 lb

Bellini - 329 lb

Ella - 336 lb

Everest I - 368 lb

Everest II - 364 lb

Jaguar - 325 lb

Katai - 374 lb

Kata-Gi - 378 lb

Milan - 337 lb

Panther - 332 lb

Red - 345 lb

Sonata - 326 lb

Vanity - 323 lb

Luxus - 323 lb